



High Performance Butterfly Valves

XOMOX

Process Valves & Actuators





XOMOX High Performance Butterfly Valves Series 600

- The new PN 16 generation of double eccentric High Performance Butterfly Valves for ON/OFF and Throttling Service.
- A combination of proven design and new ideas.
- A economically solution with excellent leakage performance and long service life.
- Patented design features (seal ring and screwless retainer)

◆ Design Features & Benefits

- Actuator mounting as per DIN ISO 5211
- Integrated travel-stop
- Maintenance-free stem packing
- Double eccentric disc mounting
- PTFE seat ring (patented)
- Screwless retainer (patented)
Flange gasket sealing face uninterrupted by retainer screws allows the use of all standard gasket designs.

◆ Technical Data

Size Range: DN 80 – 300 / NPS 3 – 12

Pressure range: up to DIN PN 16, ANSI Class 150

Temperature range: **PTFE-Seat:** 203 K bis 477 K (-70°C to +204°C)
PTFE-Seat reinforced: 203 K bis 505 K (-70°C to +232°C)

◆ Materials


Body 1.0619 (GS-C25) acc. to EN 10213-2
1.4408 nach EN 10213-4

Disc 1.4401/1.4408

◆ Approvals/Certificates

CE-marking
TA-Air Certificate
Type test approval



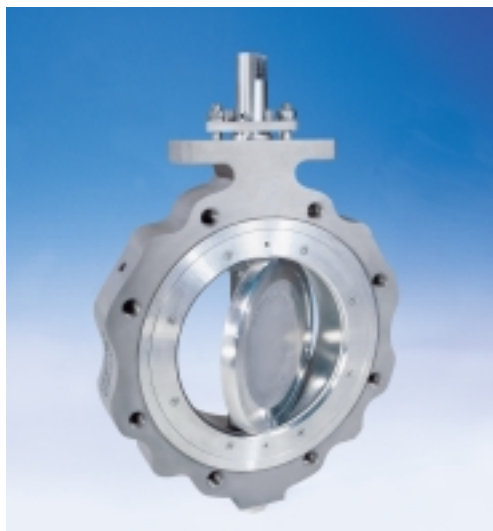

XOMOX High Performance Butterfly Valves Series 800

- Long life time
- Extreme tightness under high pressure and vacuum conditions
- Axially pliant seat represents the new design feature
- Double-offset design
- One-piece, compact body designs
- Various product options and materials for multi-purpose applications

◆ Design Features & Benefits

- Extreme tightness under high pressure and vacuum conditions in both flow directions
- Standardized face-to-face dimensions
- Low weight
- Easy maintenance

◆ Technical Data

Size Range: DN 50 – 1200 / NPS 2 – 48
larger size on request

Pressure range: PN 6 – 100, ANSI Class 150 – 600

Temperature range: **PTFE-Seat:**
203 K – 477 K (-70°C - +204°C)
PTFE-Seat reinforced:
203 K – 505 K (-70°C - +232°C)
FIRESAFE-Seat:
203 K – 573 K (-70°C - +300°C)
Metal-Graphite:
203 K – 823 K (-70°C - +550°C)
max. for gases $\Delta 6$ bar available up to DN 700

◆ Options

Screwless retainer ring- uninterrupted flange face for Wafer and Lug Design for installation of grooved and spiral wounded gaskets of all standards.
Other Seat executions on request

◆ Approvals/Certificates

Classification Society
LLOYD'S REGISTER OF SHIPPING
DET NORSKE VERITAS STOOMWEZEN B.V.
CE-marking


◆ Miscellaneous

Available styles:
a) for FITTING BETWEEN FLANGES (WAFER TYPE) with four bore holes corresponding to the flange holes for easy mounting
b) with SINGLE FLANGE (LUG TYPE)
c) with DOUBLE FLANGE

The extra large rugged mounting pad provides a solid base for mounting actuators and accessories to all bodies. On request also available with connection flange as per DIN/ISO 5211.

Mechanical Operators:
DN 50-200 / NPS 2-8 are equipped as a standard with latching lever
DN 250-1200 / NPS 10-48 are equipped as a standard-with worm gear

[XOMOX - High Performance Butterfly Valves](#)

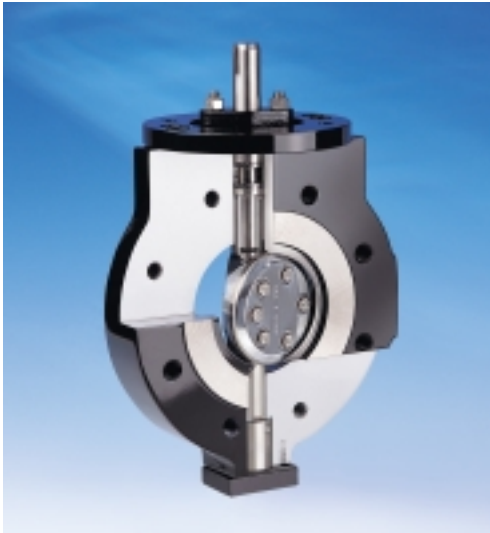

XOMOX Severe Service Butterfly Valves Series 9000

- XOMOX Severe Service Butterfly Valves Series 9000
- Superior performance by triple offset design
- High-quality and reliable shut-off and control valve for Severe Service Applications
- Metal seated butterfly valve
- Leak tightness in both directions
- FIRESAFE testing acc. to API 607 4th edition
- TA-LUFT approved design

◆ Design Features & Benefits

- Anti-blow-out proof shaft
- Floating, self-centering disc design
- Frictionless closure, no jamming
- Self-compensating in case of temperature changes
- Bi-directional tightness up to full nominal pressure
- Multi-purpose applications supported by various product options

◆ Technical Data

Size Range: DN 80 - 600 / NPS 3 – 24
Pressure Range: PN 10 – 40
 ANSI Class 150/300
Temperature Range: -196°C to +550°C

◆ Materials

Carbon Steel
 -10°C to +400°C Standard
 -10°C to +300°C Nace
Stainless Steel
 -10°C to +400°C Standard
 -10°C to +300°C Nace
 -60°C to +550°C High/Low Temp.

◆ Approvals/Certificates

Testing:
 • DIN 3230 – 3 BN, leakrate 1
 • BS 6755 leakrate A
 • API 598
 • ANSI / FCI 70-2 Class VI
 Fire-Safe Testing:
 • API 6074th Edition (no leakage in both flow directions)
 TA-Air Certificate
 CE-marking

◆ Miscellaneous

- **Main Areas of Application**
 Mineral oils, Chemical industry, Gas industry, Power plants, District heating plants, Steel industry, Sugar industry, Pulp & Paper industry, Refrigeration technology
- **Applications**
 Steam / condensate, Heating water, Combustible media, Oxygen, Processing media, Bitumen, Hot gas and exhaust gas, Low temperatures (cryogenics), Toxic media

[XOMOX - High Performance Butterfly Valves](#)



XOMOX Fully Lined Butterfly Valve Series 108

- Cost-efficient alternative vs. expensive high alloy valves
- Multi-purpose applications in various industrial applications (e.g. chemical, petrochemical & pharmaceutical)
- Minimum maintenance and life-time costs
- Superior sealing principle
- Suitable for tight shut-off or throttling service
- Excellent corrosion and diffusion resistant lining materials
- Low torque requirements
- Excellent references in chemical, seawater and offshore applications

◆ Design Features & Benefits

- Standardized actuator assembly flange acc. to DIN ISO 5211
- Different body designs (Wafer, Lug, Lug PN 20)
- Compact, two-piece valve design
- Standardized face-to-face dimensions (API 609, DIN EN 558)
- Space savings in piping systems
- Blow-out proofed one-piece disc-stem design
- Maximum internal and external corrosion resistance for highest safety aspects
- Thick corrosion resistant lining
- Independent primary and secondary sealing systems
- Seamless One Piece Molded Liner
- Body liner extension
- Fully enclosed bottom shaft

◆ Technical Data

Size Range: DN 80 - 600
NPS 3 - 24

Pressure Range: PN 10 / ANSI Class 150 derated
PN 20 / ANSI Class 150 full rated
JIS 10K and other standards on request

Temperature Range: FEP: max. 180°C
PFA: max. 200°C
PFA Antistatic on request

◆ Materials

EN-JS1049 (0.7043, GGG 40.3)
Other materials on request

◆ Options

- Disc and shaft in stainless steel
- High-tensile and pressure resistant bearing and disc materials
- Customer tailor-made solutions on request

◆ Approvals/Certificates

FDA-approval
TA-Luft approval
Type test approval
Approved to NORSOK standard

XOMOX - High Performance Butterfly Valves

XOMOX

Process Valves & Actuators



XOMOX Resilient Seated Butterfly Valves Series 7000

XOMOX Resilient Seated Butterfly Valves Series 7000 can be used in various applications. They are suitable for pressure ratings up to 16 bar and temperatures up to 120°C.

Typical Applications

- Water, sewage water and hot water plants up to 120°C
- Cooling water
- Compressed air

◆ Design Features & Benefits

- The elastomer is vulcanised onto a back-up ring. Replaceable Liner cartridge. Arching and stretching, as well as wear and increased torque are prevented.
- Save, vibration-resistant joint between disc and shaft
- Optimum disc profile for low torque and long service life of theseat
- One piece shaft
- No flange gaskets required
- Actuator flange acc. to ISO 5211

◆ Technical Data

Size Range: DN 50 – 300 / NPS 2 – 12
Pressure Range: PN 10, 16, ANSI Class 150
Temperature Range: -20°C to +120°C

◆ Materials

Wafer body made of cast iron and nodular cast iron
 Lug body made of nodular cast iron
 Liners: EPDM or NBR
 Disc: stainless steel or aluminium bronze

◆ Miscellaneous

The available elastomer liners and discs are resistant against many process media.





XOMOX Resilient Seated Butterfly Valves Series 7500

XOMOX Resilient Seated Butterfly Valves Series 7500 can be utilized in a wide range of industrial applications:

- Processes in the chemical, pulp & paper, sugar industries
- Flue gas desulfurization plants, gas industries
- Cooling water, Heating, Ventilating & Air Conditioning (HVAC), Fire Fighting Systems
- Compressed air, nitrogen generation plants, cement industry
- Iron & steel plants, cargo services, sea water, oil and other energy piping systems (ship industry)
- Water circulation, water treatment plants

◆ Design Features & Benefits

- Corrosion free service
- Permanently tight closure
- Replaceable Liner cartridge
- Simple installation, suitable for full vacuum
- Permanent lubrication
- Maintenance-free operation
- Exchangeable Actuators - Simple conversion
- Optimum actuator adaptation
- Short face-to-face dimensions, low overall height, space and cost saving
- Wafer or lug body

◆ Technical Data

Size Range: DN 40 - 120 / NPS 1½ - 48
Pressure Range: PN 10,16, ANSI Class 150
Temperature Range: -34 °C to + 150 °C

◆ Materials

Wafer body: Cast Iron or Ductile Iron
 Lug body: Ductile Iron or Carbon Steel
 Flanged body: Ductile Iron or Carbon Steel
Disc:
 Stainless Steel, Alu-Bronze, GGG nickel plated, Hastelloy, Duplex, Rilsan coated, ECTFE coated, Hostalen GUR lined
Body lining:
 EPDM, EPDM-H, NBR, HBNR, FPM, CSM

◆ Approvals/Certificates

CE-marking
 ISO 9001 / EN 29001
 American Bureau of Shipping (ABS)
 DVGW-Gas
 WRC / KTW for drinking water
 Bureau Veritas
 Lloyd's Register of Shipping



Process Valves & Actuators

CRANE

A Crane Co. Company

XOMOX Products Profile

Sleeved Plug Valves

DIN and ANSI versions.
On-Off-valves, Multiport valves (3 to 5-way valves).
Jacketed valves.

Metallic Ball Valves

DIN and ANSI versions.
On-Off-valves, multiport valves (3 to 5-way valves).
Special valves.

High Performance Butterfly Valves

DIN and ANSI versions.
PTFE, FIRESAFE and metal seat DN 50 to DN 2550,
NPS 2 to 102, WAFER- and LUG-design.

Fully Lined Plug Valves

DIN and ANSI versions.
On-Off-valves, FEP and PFA lining.
Multiport valves (3 to 5-way valves).
Jacketed valves.

Fully Lined Ball Valves

DIN and ANSI versions.
PFA- and FEP-lining.

Fully Lined Butterfly Valves

DIN and ANSI versions.
WAFER- and LUG design, PFA-, FEP- and PTFE-lining.

Other Fully Lined Valves

Check valves, sight glasses, filters and strainers,
dip pipes and PTFE gaskets.

Control Valves

Control valves for precise throttling service.

Actuators and Accessory

XOMOX XRP-actuators for plug-, ball- and butterfly valves.
Complete actuation accessory packages.

Detailed technical information providing comprehensive data is available on request.

XOMOX - Your Partner in Valves

Continuous improvement is the foundation of our EN ISO 9001 certified Quality Process. We believe that continuous improvement is necessary at all levels and in all functions across the organization.

Our Quality Process relies on effective teamwork between our customers, employees, suppliers, representatives and communities.

www.xomox.de

XOMOX Process Valves & Actuators

XOMOX International GmbH & Co.

Von-Behring-Straße 15
D-88131 Lindau/Bodensee
Telefon: (49) 8382-702-0
Fax: (49) 8382-702-144
info@xomox.de

Subject to technical modifications.

XOMOX Worldwide Manufacturing, Sales and Service

Europe / Middle East / Africa / America

BUNDESREPUBLIK DEUTSCHLAND

XOMOX International GmbH & Co
Tel.: (49) 8382-702-0
Fax: (49) 8382-702-144
info@xomox.de

XOMOX Burgkirchen
Tel.: (49) 8679-6092/93
Fax: (49) 8679-4944
burgkirchen@xomox.de

XOMOX Göhren
Tel.: (49) 34638-6080
Fax: (49) 34638-60899
goehren@xomox.de

XOMOX Grevenbroich
Tel.: (49) 02181-4944-0
Fax: (49) 02181-4944-44
grevenbroich@xomox.de

XOMOX Norderstedt
TEL.: (49) 40-526860-0
FAX: (49) 40 526860-33
norderstedt@xomox.de

XOMOX Wachenheim
Tel.: (49) 06322-9465-0
Fax: (49) 06322-9465-20
wachenheim@xomox.de

BELGIE/BELGIQUE

XOMOX Belgium
Tel.: (32) 3-6468675/
3-6451796
Fax: (32) 3-6441975
belgie@xomox.de

PROMETAL N.V.
Tel.: (32) 3-2051320
Fax: (32) 3-2328434

ČESKÁ REPUBLIKA

XOMOX
Tel.: (420) 558 877 146
Fax: (420) 558 877 146

ESPAÑA

XOMOX International GmbH & Co. OHG
Sucursal en España
Tel.: (34) 93 786 92 50
Fax: (34) 93 785 98 51
espana@xomox.de

FRANCE

XOMOX France S.A.
Tel.: (33) 389-611361
Fax: (33) 389-064011
france@xomox.de

XOMOX Agence Paris
Tel.: (33) 164920113
Fax: (33) 169920118
france@xomox.de

HUNGARIA

XOMOX
MAGYARORSZAG KFT
Ceh u. 1.
8000 Székesverhérvár
Tel.: (36) 06-22-513-100
Fax: (36) 06-22-513-131
magyarorszag@xomox.de

ITALIA

CRANE PROCESS FLOW TECHNOLOGIES S.r.l.
Division XOMOX Italia
Tel.: (39) 039 2704373
Fax: (39) 039 2704450
lorenzo_bisogno_xomox@cranefflow.com

MIDDLE EAST

XOMOX Germany
Tel.: (49) 8382-702-0
Fax: (49) 8382-702-216
info@xomox.de

NETHERLAND

XOMOX Nederland
Tel.: (31) 181-618100
Fax: (31) 181-614100
nederland@xomox.de

NORGE

XOMOX Norge
Tel.: (47)231-73500
Fax: (47)231-73501
norge@xomox.de

ÖSTERREICH

XOMOX International Ges.mbh
Tel.: (43) 732-652400/
732-661086
Fax: (43) 732-665541
austria@xomox.de

POLSKA

XOMOX
Tel.: (48) 32-2873428
Fax: (48) 32-2873428

RUSSIA

XOMOX
Tel.: (7) 095-9265406
(7) 095-202 6919
Fax: (7) 095-202 6919
andrey-xomox@mtu-net.ru

SCHWEIZ

XOMOX AG
Tel.: (41) 61-4859550
Fax: (41) 61-4859555
schweiz@xomox.de

SUOMI/FINLAND

XOMOX Finland GmbH & Co
Sivulilike Suomessa
Tel.: (358)14-3385000
Fax: (358)14-3385050
suomi@xomox.de

SVERIGE

XOMOX Sverige
Tel.: (46) 303-88980
Fax: (46) 303-88982
sverige@xomox.de

UNITED KINGDOM

XOMOX Ltd.
Tel.: (44) 1271-311111
Fax: (44) 1271-322022
uk@xomox.de

USA

XOMOX Cincinnati
Tel.: (1) 513 745-6000
Fax: (1) 513-745-6972
www.xomox.com

Further manufacturing, sales and service in:

USA, Brasil, Canada, China, India, Japan, Korea, Mexico and Singapore

XOMOX Service and Automation Center

Our EN ISO 9001 certified Service and Automation Centers offer comprehensive service, including valve automation, repair, modification, accessory packaging and other services. We also have standard valves, spare and accessory parts in stock.

Our Service and Automation Centers offer our customers complete service and quick turnaround for the most urgent requirements.